

Side Weld Bag Handles

Pinning 5


Problem

To provide a handle for bags made in this way, an in-line punch is used to cut a handle shape from the web prior to the cut/seal head. During the manufacturing process the web is 'pulsed' forward according to its required length. Whilst momentarily stationary, a punch cuts the shape for the handle. When the web moves forward again air can enter the plastic tube, causing a jam at the sealing head.

Solution

A static generator bar is placed in-line and prior to the punch. It is synchronised with the punch to pulse 'on' to pin the web closed. This prevents air from entering when the web moves forward.

Fig.

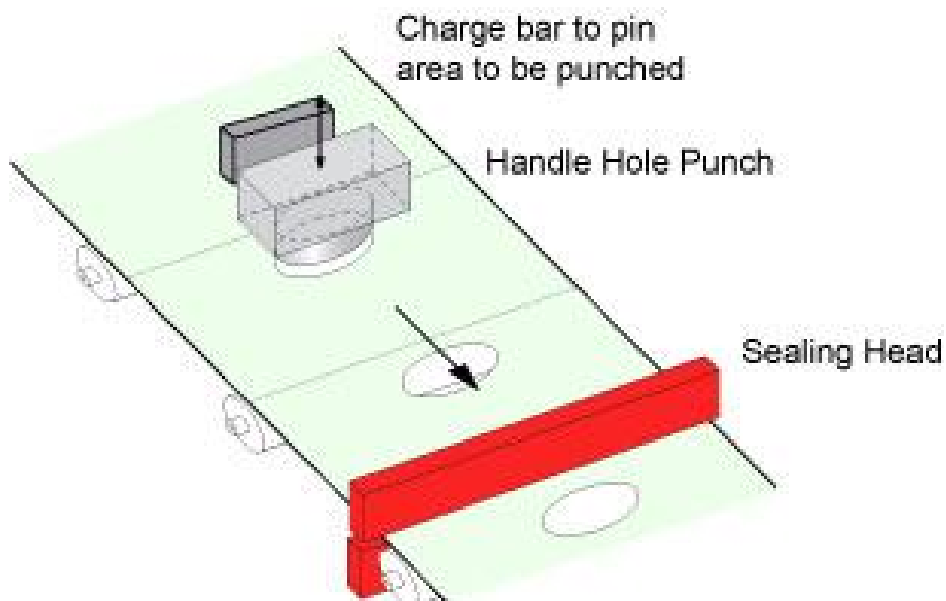

APPLICATION NOTE

Meech International

2 Network Point
Range Road, Witney
OX29 0YD, UK

Tel: +44 (0) 1993 706700

Fax: +44 (0) 1993 776977

email: sales@meech.com